Cincinnati-Dayton Road Drainage Study

Project #: 150594.000

West Chester Township
Butler County, Ohio
Prepared: July 25, 2016

Designed By: Adam C. Berner, P.E.
The Kleingers Group
6305 Centre Park Drive
West Chester, OH 45069
(513) 779-7851, (513) 779-7852 fax
www.kleingers.com

Table of Contents

Project Summary 2

Drainage Map 3

Drainage Calculations 4

Storm Plan & Profile 5

Engineer's Opinion of Probable Costs 6

Appendix A - Cobblers Creek Stormwater Detention Calculations

Appendix B - SWS Environmental Field Summary (added by BCEO, post Kleinger Report)

Project Summary:

At the request of the Butler County Stormwater District, The Kleingers Group investigated an existing private storm sewer system running through several properties on the southern side of the 7500 block of Cincinnati-Dayton Road. This existing storm sewer system has not functioning properly and is causing localized flooding on several of the properties in the area. The Kleingers Group studied the existing system to try and determine the cause of the issue and also has provided a preliminary recommendation to resolve the issue.

An attempt was made to video the existing storm pipes (ranging from 24" diameter to 36" diameter) that are part of this existing storm network to verify the condition of the pipes. Unfortunately, due to the silt and debris within the pipes, only a very small portion of the pipes were able to be video'd. For the portions that were able to be video'd, the pipe conditions varied, as some portions were in decent condition whereas another section was not in good shape and was showing signs of deformation.

As part of the study of the drainage system, watersheds for each of the storm inlets within this network were delineated using Butler County GIS data as well as visual site observations. Runoff coefficients and times-of-concentration were calculated for each watershed within this study area to determine the 10-year flows. The 10-year flows from the watersheds for the two existing detention basin systems within the Cobbler's Creek subdivisions were based on the existing detention calculations provided to us by Butler County (refer to Appendix A for a copy of those calculations). The 10-year flows within this study area were then used to size a new storm sewer network designed to carry a 10-year storm event within the pipes. Once the pipe sizes were determined that would be able to carry the 10-year storm event, the pipe sizes each were increased by one pipe size to account for any debris that could eventually get trapped within these new storm pipes. A copy of the storm calculations can be found on 5 of this report.

The proposed storm network (consisting of pipes ranging from 36" diameter to 48" diameter) is shown in an exhibit on Page 6 of this report. A preliminary option of probable construction cost for the work shown that exhibit is $180,000 and a full breakdown on this cost amount is shown on Page 7 of this report.

INSPIRED PEOPLE ▲ CREATIVE DESIGN ▲ TRANSFORMING COMMUNITIES



KEYNOTES:

1. NORTHERN DETENTION BASIN
2. SOUTHERN DETENTION BASIN
3. PIPE INLET
4. PIPE INLET
5. PIPE INLET
6. PIPE INLET

OHIO Utilities Protection SERVICE
811 or 1-800-362-2764 Call Before You Dig

NOTE:
UNDERGROUND UTILITIES ARE PLOTTED FROM A COMPILATION OF AVAILABLE RECORD INFORMATION AND SURFACE INDICATIONS OF UNDERGROUND STRUCTURES AND MAY NOT BE INCLUSIVE. PRECISE LOCATIONS AND THE EXISTENCE OR NON EXISTENCE OF UNDERGROUND UTILITIES CANNOT BE VERIFIED. PLEASE NOTIFY THE OHIO UTILITY PROTECTION SERVICE AT 1-800-362-2764 BEFORE ANY PERIOD OF EXCAVATION OR CONSTRUCTION ACTIVITY.

THE KLEINGERS GROUP
CIVIL ENGINEERING
SURVEYING
LANDSCAPE ARCHITECTURE
www.kleingers.com
6305 Centre Park Dr.
West Chester, OH 45069
513.779.7851

SEAL:

NO. DATE DESCRIPTION

CINCINNATI DAYTON ROAD DRAINAGE STUDY

7546 CINCINNATI DAYTON RD.
WEST CHESTER TOWNSHIP, OH 45069

PROJECT NO: **150594.000**
DATE: **07/25/2016**
SCALE: 0 50 100 200

SHEET NAME:
DRAINAGE MAP

SHEET NO.
3

THE KLEINGERS GROUP

STORM SEWER COMPUTATIONS

07/25/2016

6305 Centre Park Drive
West Chester, OH 45069
513.779.7851


Project: CINCINNATI-DAYTON RD DRAINAGE STUDY
Project Number: 150594


Design Storm: 10.00 yr
Manning's n: 0.013

LOCATION		BASIN DATA										Comments	PIPE DATA									
Inlet	Outlet	ΔA (ac)	ΣA (ac)	ΔT_c (min)	ΣT_c (min)	Design i (in/hr)	Coeff. C	ΔCA (ac)	ΣCA (ac)	Design Discharge (cfs)	Total Design Discharge (cfs)	Total Design Discharge Column Explanation	Pipe Size (in)	Pipe Length (ft)	Pipe Slope (ft/ft)	US Invert (ft)	DS Invert (ft)	Mean Velocity (ft/sec)	Pipe Full Capacity (cfs)	Grate Elevation (ft)	Cover Upstream (ft)	Cover (Downstream) (ft)
	Ex. Basin 1									68.20	68.20	Release rate from Detention 1 per report										
HW-104	CB-103	1.98	1.98	14	14	4.59	0.42	0.83	0.83	3.82	72.02	Q_{10}(HW-104) + Detention 1 cfs	36	236	0.0445	780.00	769.50	19.96	141.06		0.00	1.50
	Ex. Basin 2									15.30	15.30	Release rate from Detention 2 per report										
Existing pipe #1	CB-103	0.78	0.78	13	13	4.72	0.43	0.34	0.34	1.58	16.88	Q_{10}(Existing pipe #1) + Detention 1 cfs	24	225	0.0168	783.50	779.72	9.36	29.40	788.00	0.00	-7.72
CB-103	CB-101	6.58	9.34	25	25	3.54	0.49	3.22	4.39	15.55	99.05	Q_{10}(CB-103) + cfs outlet into CB-103	48	269	0.0296	765.08	757.12	19.72	247.76	774.00	4.92	4.88
CB-101	EX HW-100	1.29	10.63	14	25	3.54	0.46	0.59	4.98	17.65	116.71	Q_{10}(CB-101) + cfs outlet into CB-101	54	112	0.0100	757.12	756.00	12.40	197.18	766.00	4.38	0.00

Designed: ACB

INSPIRED PEOPLE ▲ CREATIVE DESIGN ▲ TRANSFORMING COMMUNITIES

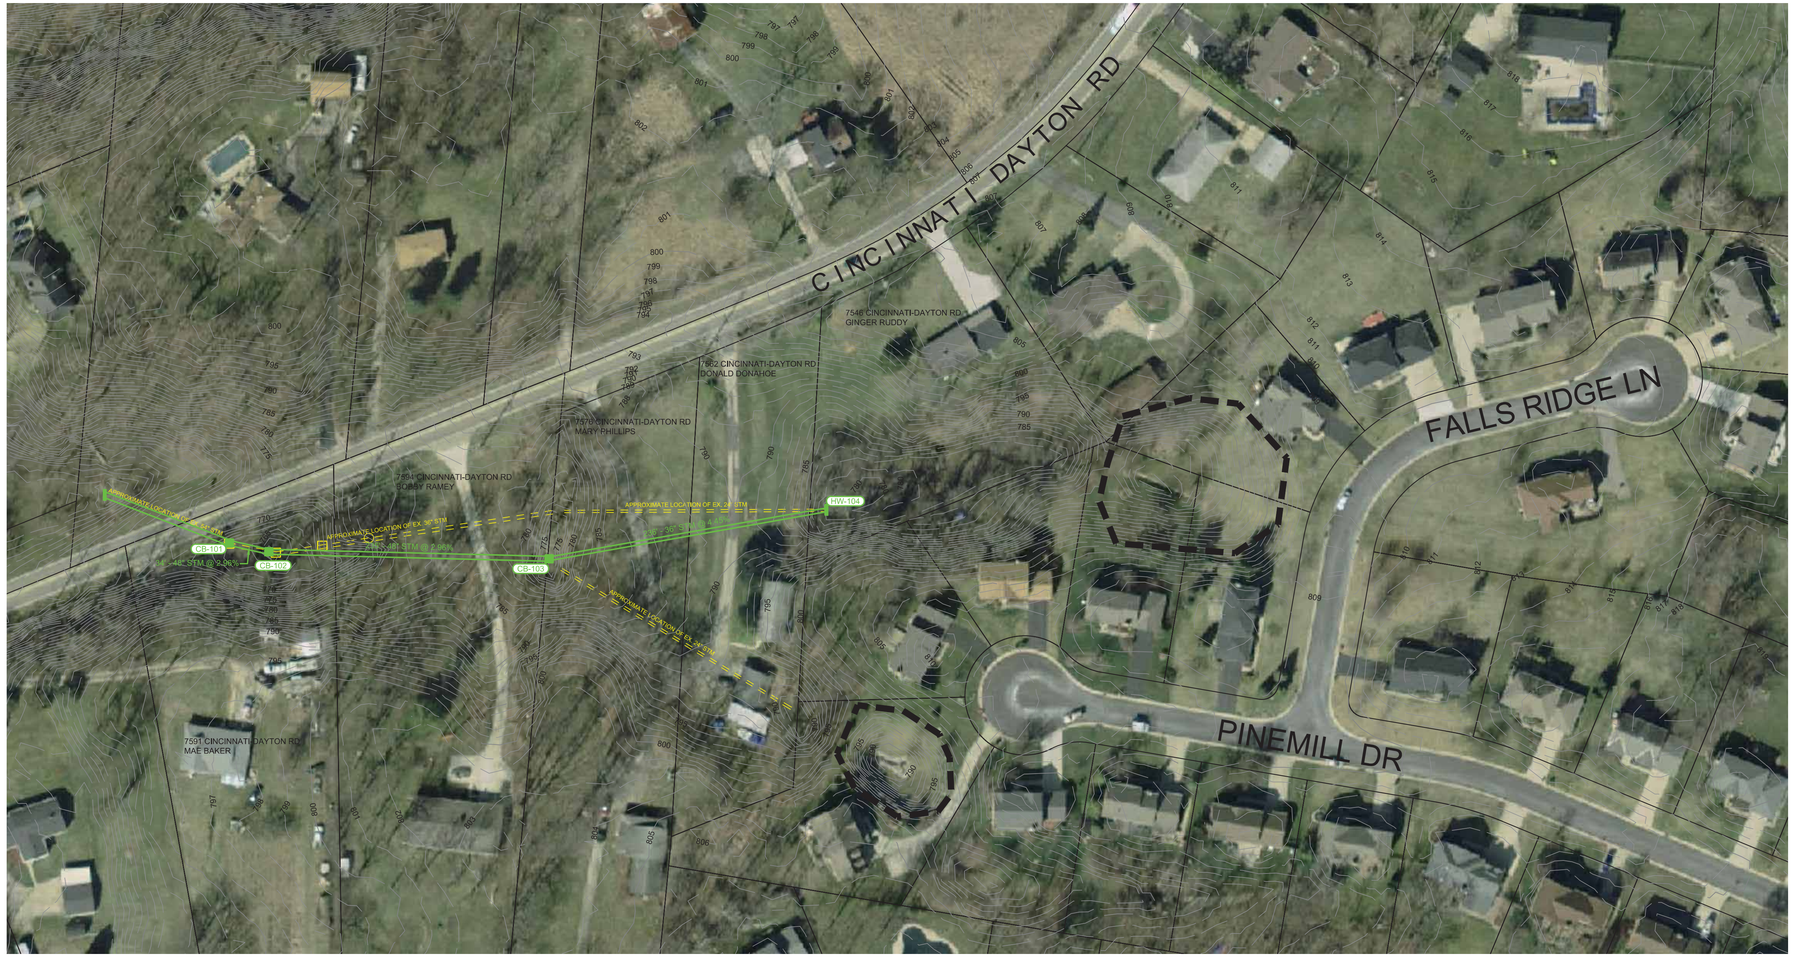

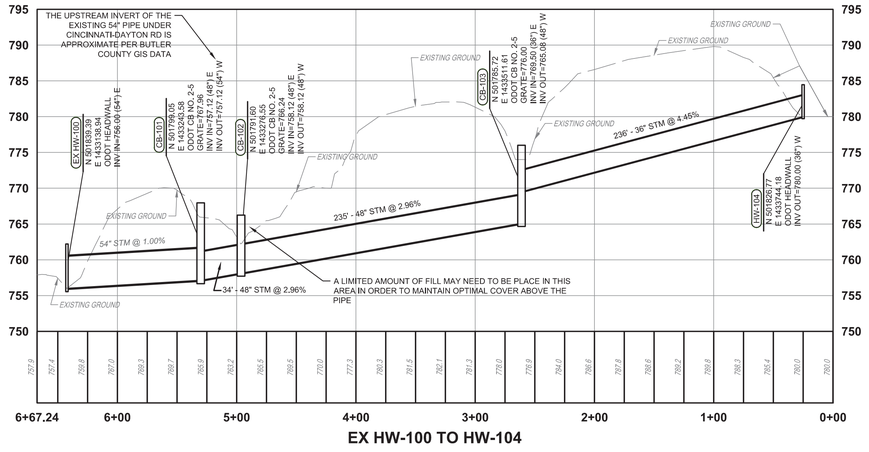

EX HW-100 TO HW-104

NOTE:
ALL INFORMATION IS BASED OFF OF THE BUTLER COUNTY GIS DATABASE

PRELIMINARY- NOT FOR CONSTRUCTION

OHIO Utilities Protection SERVICE
811 or 1-800-362-2764
Call Before You Dig

NOTE:
UNDERGROUND UTILITIES ARE PLOTTED FROM A COMPILATION OF AVAILABLE RECORD INFORMATION AND SURFACE INDICATIONS OF UNDERGROUND STRUCTURES AND MAY NOT BE INCLUSIVE. PRECISE LOCATIONS AND THE EXISTENCE OR NON EXISTENCE OF UNDERGROUND UTILITIES CANNOT BE VERIFIED. PLEASE NOTIFY THE OHIO UTILITY PROTECTION SERVICE AT 1-800-362-2764 BEFORE ANY PERIOD OF EXCAVATION OR CONSTRUCTION ACTIVITY.

THE KLEINGERS GROUP
CIVIL ENGINEERING
SURVEYING
LANDSCAPE ARCHITECTURE
www.kleingers.com
6305 Centre Park Dr.
West Chester, OH 45069
513.779.7851

SEAL:

NO.	DATE	DESCRIPTION

CINCINNATI DAYTON ROAD DRAINAGE STUDY

7546 CINCINNATI DAYTON RD.
WEST CHESTER TOWNSHIP, OH
45069

PROJECT NO: **150594.000**
DATE: **07/25/2016**
SCALE: V 0 5 10 20 / H 0 30 60 120

SHEET NAME:
STORM PLAN & PROFILE

SHEET NO.
5

Date: 07/25/2016
Designed By: ACB

CINCINNATI DAYTON ROAD DRAINAGE STUDY

Engineer's Opinion of Probable Costs

THE KLEINGERS GROUP

Item	Description	Actual Quantity	Unit	Unit Price	Total
	DEMOLITION				
1	Existing Storm	455	LF	$25.00	$11,375.00
2	Existing Catch Basin	3	EA	$550.00	$1,650.00
3	Existing Gravel Drive	60	SY	$1.00	$60.00
4	Existing Storm MH	1	EA	$1,000.00	$1,000.00
5	Existing Concrete Drive	30	SY	$5.00	$150.00
6	Sawcut	1	LS	$500.00	$500.00
7	Tree Clearing	1	LS	$24,200.00	$24,200.00
				Demolition Total=	$38,935.00
	ROADWAY				
8	Gravel Driveway	60	SY	$12.00	$720.00
9	Concrete Driveway	30	SY	$75.00	$2,250.00
				Roadway Total=	$2,970.00
	DRAINAGE				
1	36" Storm	236	LF	$125.00	$29,500.00
2	48" Storm	269	LF	$150.00	$40,350.00
3	ODOT Type 2-5 Catch Basin	3	EA	$3,300.00	$9,900.00
4	ODOT Full Height Headwall (36" Pipe)	1	EA	$1,900.00	$1,900.00
				Drainage Total=	$81,650.00
	MISC. UTILITIES				
1	Remove/Replace Water Service Line	4	EA	$5,000.00	$20,000.00
				Misc. Utilites Total=	$20,000.00
	EROSION				
1	Seeding and Mulching	470	SY	$2.00	$940.00
2	Erosion Control	1	LS	$5,000.00	$5,000.00
				Erosion Total=	$5,940.00
				Total Construction Subtotal=	$149,495.00
				20% Design Contingency ± =	$30,505.00
				Grand Total=	$180,000.00

Note: These engineer's quantities are not intended to be all inclusive. It is expected that the contractor will perform a detailed analysis and calculation of all construction materials necessary to complete the job according to the approved set of construction plans.

Based on Concept drawings plans in July, 2016

Appendix A

RATIONAL METHOD OF

RETENTION BASIN DESIGN OF STORAGE VOLUME

(30 acres or less)

Calculate 10 yr. existing flow qo=ACi

L = 700' DIFF. EL. 816.4 - 794 = 32.4 ÷ 7 = 4.63% t_c = 21 MIN

Drainage area, A= 4.3 acres

X

Runoff coefficient, C= 0.4

X

Calculate intensity, i

i = a/b + tc

a = 170

b = 23

tc = 21

$$i = \frac{170}{23 + 21}$$

i = 3.86

=

The allowable release rate, qo, is 6.65 c.f.s.

6.65 + 61.5 (OFFSITE DRAINAGE) = 68.2 cfs

Calculate the 100 yr. proposed flow Qo=ACI max

Drainage area, A= 4.3 acres

Runoff coefficient, C= 0.5

Calculate maximum time of concentration, TC max

a=290

b=31

$$Tcmax = \sqrt{\frac{A \times C \times a \times b}{\frac{2 \times qo}{3} - \frac{qo^2 \times tc}{6 \times C \times A \times a}}} - b$$

$$Tcmax = \sqrt{\frac{4.3 \times 0.5 \times 290 \times 31}{\frac{2 \times 6.65}{3} - \frac{6.65^2 \times 21}{0.5 \times 4.3 \times 290 \times 6}}} - 31$$

Tcmax = 37

Calculate maximum intensity, I max

$$Imax = \frac{a}{b+Tcmax}$$

a=290
b=31

Tcmax = [37]

$$Imax = \frac{290}{31+[37]}$$

Imax =

A = [4.3] acres

x

C = [0.5]

x

Imax = [4.3]

=

[9.2] c.f.s.

The flow at maximum duration, Qo is

CALCULATE STORAGE VOLUME NEEDED

$$Vol = 60 \times Qo \times Tcmax - \frac{2 \times qo \times (TCmax + tc) \times 60}{3} + \frac{qo^2 \times tc \times 60}{6 \times Qo}$$

20,412 15,428 1029.6

$$Vol = 60 \times [9.2] \times [37] - \frac{2 \times [6.65] \times ([37]+[21]) \times 60^{10}}{3} + \frac{[6.65]^2 \times [21] \times 60}{6 \times [9.2]}$$

Vol = [6005] cubic feet PROVIDED 6500 C.F.

ALLOWABLE RELEASE RATE = 68.2 cfs

ORIFICE 3'W x 2.5'H = 7.5 ϕ

$Q = 7.5(0.62)\sqrt{2gh} = 67.7$ cfs ✓

Detention Volumes

Lot 110

Area @ Elev. 787 = 0

" @ " 788 = 500 s.f. $\frac{0+500}{2}(1)$ = 250 c.f.

" @ " 790 = 1250 s.f. $\frac{500+1250}{2}(2)$ = 1750 c.f.

" @ " 792 = 2300 s.f. $\frac{1250+2300}{2}(2)$ = 3550 "

" @ " 794 = 3700 s.f. $\frac{2300+3700}{2}(2)$ = 6000 "

" @ " 796 = 5250 s.f. $\frac{3700+5250}{2}(2)$ = 8950 "

Total 20,500 c.f.

Lot 109

Area @ Elev 794 = 100 s.f.

" " " 796 = 750 s.f. $\frac{100+750}{2}(2)$ = 850 c.f.

Grand Total = 21,350 c.f.

Lots 113-115

Area @ Elev 783.2 = 0

" " " 786 = 800 $\frac{0+800}{2}(2.8)$ = 1120

" " " 788 = 1950 $\frac{800+1950}{2}(2)$ = 2750

" " " 789.2 = 2500 $\frac{1950+2500}{2}(1.2)$ = 2670

Total 6540 c.f.

Capacity C.B. "L" 3.0' Head (from window sill)

From ODOT Chart: 1 Window(4') = 37.9 cfs − 19.8 (Grate Capacity) = 18.10

18.1(3) = 54.3 cfs (3 windows) + 19.8 (Grate) = **74.1 cfs** Total

Lot 1 & 2 Corsicana Creek Block "C"

RATIONAL METHOD OF RETENTION BASIN DESIGN OF STORAGE VOLUME

(30 acres or less)

Calculate 10 yr. existing flow qo=ACi

L=1800' DIFF. ELEV. 839.3-786.5 = 52.8 = 1.93 = 2.93 t_c = 33 Min

Drainage area, A= 12.6 ✓ acres

X

Runoff coefficient, C= 0.4

X

Calculate intensity, i

i = a/b + tc

a = 170

b = 23

tc = 33

$i = \frac{170}{23+33}$

i = 3.04

=

The allowable release rate, qo, is 15.3 c.f.s.

Calculate the 100 yr. proposed flow Qo=ACI max

Drainage area, A= 12.6 ✓ acres

Runoff coefficient, C= 0.5

Calculate maximum time of concentration, TC max

a=290

b=31

$$Tcmax = \sqrt{\frac{A \times C \times a \times b}{\frac{2 \times qo}{3} - \frac{qo^2 \times tc}{6 \times C \times A \times a}}} - b$$

56637

$$Tcmax = \sqrt{\frac{12.6 \times 0.5 \times 290 \times 31}{\frac{2 \times 15.3}{3} - \frac{15.3^2 \times 33}{0.5 \times 12.6 \times 290 \times 6}}} - 31$$

10.2

95

Tcmax = 46.2

Calculate maximum intensity, I max

$$Imax = \frac{a}{b+Tcmax}$$

a=290
b=31

Tcmax = 46.2

$$Imax = \frac{290}{31+46.2}$$

Imax =

A = 12.6 acres

x

C = 0.5

x

Imax = 3.76

=

23.7 c.f.s.

The flow at maximum duration, Qo is

CALCULATE STORAGE VOLUME NEEDED

$$Vol = 60 \times Qo \times Tcmax - \frac{2 \times qo \times (TCmax + tc) \times 60}{3} + \frac{qo^2 \times tc \times 60}{6 \times Qo}$$

$$Vol = 60 \times 23.7 \times 46.2 - \frac{2 \times 15.3 \times (46.2 + 33) \times 60}{3} + \frac{15.3^2 \times 33 \times 60}{6 \times 23.7}$$

Vol = 20,485 cubic feet PROVIDED 20,600 c.f.

ALLOWABLE RELEASE RATE = 15.3 cfs ✓

ORIFICE SIZE 15" ϕ H = 6.55'

$Q = 1.2272(0.62)\sqrt{2g(6.55)} = 15.6$ cfs ✓ CLOSE ENUFF!

n_{RCP} = 0.013 n_{36} = 0.013 n_{42} = 0.013 $n_{12"}$ = 0.011 $n_{15"}$ = 0.013 n_{18} 0.014 $n_{24"}$ = 0.016

TOWN SEWER DESIGN FOR BLOCK "C" COBBLERS CREEK BY JJD

JOHN J. DUFFY & ASSOCIATES Q=ACi RUNOFF COEFFICIENT (C) 0.50 Craig 6-25-90 DATE 6-4-90

Street	From	To	Dist. ft.	Time (Min.) Inc.	Time (Min.) Total	Area (Acres) Inc.	Area (Acres) Total	Runoff (Q) c.f.s.	Grade %	Size in.	Cap. c.f.s.	Vel. f.p.s.
PINEMILL DR	CB "A"	CB "B"	270'		15.0		2.6 ✓	5.8	2.3	12" ✓	5.17 7.05	9.0
" "	CB "B"	CB "C"	306	0.5	15.5	2.7 ✓	5.3	11.7 ✓	2.0	18" ✓	12.89 13.8 ✓	7.8
" "	CB C	CB D	360'	0.65	16.15	3.1 ✓	8.4	18.2 ✓	1.5	24" ✓	24.01 22.5 ✓	7.2
" "	CB D	CB E	250'	0.83	18.0	1.9 ✓	10.3	21.4 ✓	1.0	30" ✓	29.6 ✓	6.0
" "	CB E	CB F	223'	0.7	18.7	1.9 ✓	12.2	24.9 ✓	1.0	30" ✓	29.6 ✓	6.0
" "	CB F	CB G	98'	0.6	19.3	1.4 ✓	13.6	27.3 ✓	2.4	30" ✓	45.9 ✓	9.3
" "	CB G	HW "H"	73'	0.2	19.5	0.4 ✓	14.0 ✓	28.0 ✓	6.0	24" ✓	48.03 45.0 ✓	14.3
DETENTION OUTLET	CB-2-3	HW-4	44'				14.0	28.0 ✓	2.4	30" ✓	45.9 ✓	9.4
FALLS RIDGE LA	CB "Q"	CB "R"	88'		14.0		2.2 ✓	5.1 ✓	1.0	15" ✓	6.61 6.6 ✓	5.2
	CB "R"	CB "M"	28'	0.3	14.3	0.3 0.6	2.5	5.7 ✓	1.0	15" ✓	6.61 6.6 ✓	5.2
T CB "K" D.A =	34.0 Ac.	L = 1600'	Diff El = 823 - 809 =	34'		Slope	= 34/1600 = 2.13%	t_c =	24 Min.	C=0.5		
FALL RIDGE LA	CB "K"	CB "L"	95'		24.0		34.0 ✓	61.5 ✓	3.6	36" ✓	86.56 ✓	12.2
" " "	CB "L"	CB "M"	108'	0.1	24.1	0.3 ✓	34.3	61.9 ✓	3.6	36" ✓	86.56 ✓	12.2
" " "	CB "M"	MH "N"	175'	0.1	24.2	2.9 ✓	37.2	67.0 ✓	2.4%	36" ✓	70.7 ✓	10.0
" " "	MH "N"	CB "O"	94	0.3	24.5	— ✓	37.2	66.6 ✓	2.4	36" ✓	70.7 ✓	10.0
" " "	CB "O"	HW "P"	114'	0.2	24.7	2.4 ✓	39.6 ✓	70.6 ✓	3.8	36" ✓	88.9 ✓	12.6
OUTLET	CB-2-4	HW-4	36'					70.6 ✓	3.0	36" ✓	79.0 ✓	11.2

CATCH BASIN 2-3 OR 2-4 GRATE AND WINDOW WITH NO CLOGGING

H MEASURED FROM WINDOW SILL TOP OF GRATE IS 11 INCHES ABOVE WINDOWSILL

	WIDTH OF WINDOW (FT)							
H	0	2	3	4	5	6	7	8
.1	.0	1.6	2.4	3.2	4.1	4.9		
.2	.0	2.3	3.4	4.6	5.8	6.9		
.3	.0	2.8	4.2	5.7	7.1	8.5		
.4	.0	3.2	4.9	6.5	8.2	9.8		
.5	.0	3.6	5.5	7.3	9.2	11.0		
.6	.0	4.0	6.0	8.0	10.1	12.1		
.7	.0	4.3	6.5	8.7	10.9	13.0		
.8	.0	4.6	6.9	9.3	11.6	13.9		
.9	.0	4.9	7.4	9.8	12.3	14.8		
1.0	.7	5.9	8.5	11.1	13.7	16.3		
1.1	2.0	7.5	10.2	12.9	15.7	18.4		
1.2	3.7	9.4	12.3	15.2	18.0	20.9	23.8	26.7
1.3	5.8	11.7	14.7	17.7	20.6	26.5		
1.4	8.1	14.3	17.3	20.4	23.5	28.2		
1.5	10.6	17.0	20.1	23.3	26.5	29.7		
1.6	11.4	18.0	21.3	24.6	27.9	31.2		
1.7	12.2	19.0	22.4	25.8	29.2	32.6		
1.8	12.9	19.9	23.4	26.9	30.4	33.9		
1.9	13.7	20.8	24.4	28.0	31.6	35.2		
2.0	14.3	21.7	25.4	29.1	32.8	36.4		
2.1	15.0	22.5	26.3	30.1	33.9	37.6		
2.2	15.6	23.3	27.2	31.0	34.9	38.8		
2.3	16.2	24.1	28.0	32.0	35.9	39.9		
2.4	16.7	24.8	28.9	32.9	36.9	41.0		
2.5	17.3	25.5	29.7	33.8	37.9	42.0		
2.6	17.8	26.2	30.4	34.6	38.8	43.0		
2.7	18.3	26.9	31.2	35.5	39.6	44.0		
2.8	18.8	27.6	31.9	36.3	40.7	45.0		
2.9	19.3	28.2	32.6	37.1	41.5	46.0		
3.0	19.8	28.8	33.4	37.9	42.4	46.9	51.4	55.9
3.1	20.3	29.5	34.0	38.6	43.2	47.8		
3.2	20.7	30.1	34.7	39.4	44.1	48.7		
3.3	21.2	30.6	35.4	40.1	44.9	49.6		
3.4	21.6	31.2	36.0	40.8	45.7	50.5		
3.5	22.0	31.8	36.7	41.6	46.4	51.3		
3.6	22.5	32.4	37.3	42.3	47.2	52.2		
3.7	22.9	32.9	37.9	42.9	48.0	53.0		
3.8	23.3	33.4	38.5	43.6	48.7	53.8		
3.9	23.7	34.0	39.1	44.3	49.4	54.6		
4.0	24.1	34.5	39.7	44.9	50.2	55.4		
4.1	24.5	35.0	40.3	45.6	50.9	56.1		
4.2	24.8	35.5	40.9	46.2	51.6	56.9		
4.3	25.2	36.0	41.4	46.8	52.3	57.7		
4.4	25.6	36.5	42.0	47.5	52.9	58.4		
4.5	25.9	37.0	42.5	48.1	53.6	59.1		
4.6	26.3	37.5	43.1	48.7	54.3	59.9		
4.7	26.7	38.0	43.6	49.3	54.9	60.6		
4.8	27.0	38.4	44.1	49.9	55.6	61.3		
4.9	27.4	38.9	44.7	50.4	56.2	62.0		
5.0	27.7	39.4	45.2	51.0	56.8	62.7		
5.1	28.0	39.8	45.7	51.6	57.5	63.4		
5.2	28.4	40.3	46.2	52.1	58.1	64.0		
	28.7	40.7	46.7	52.7	58.7	64.7		

COBBLERS CREEK, BLOCK "C"
ESTIMATE OF PEAK DISCHARGE
USGS REPORT 86-4197

$A = 34$ Ac. $= 0.053$ sq. Mi

$SL = 843 - 809 / .30 mi = 113.3'/Mi$

$EL = 843 + 809 / 2(1000) = 0.826$

BDF (5)

$$Q_{10} = 192(A)^{0.76}(SL)^{0.34}(EL)^{0.91}(13-BDF)^{-0.34}$$

$$Q_{10} = 192(0.053)^{0.76}(113.3)^{0.34}(0.826)^{0.91}(8)^{-0.34}$$

$$Q_{10} = (20.6)(5.0)(0.84)(0.49) = \underline{42.4 \text{ cfs}}$$

$$Q_{25} = 209(0.053)^{0.78}(113.5)^{0.37}(0.826)^{1.00}(8)^{-0.29}$$

$$Q_{25} = (21.14)(5.76)(0.826)(0.55) = \underline{55.3 \text{ cfs}}$$

Q_{10} By RATIONAL METHOD $= \underline{61.5 \text{ cfs}}$

PERSONNAL

℄ π

GF ϕ

BUTLER COUNTY ENGINEER'S OFFICE AND OPERATIONS FACILITY
1921 FAIRGROVE AV. HAMILTON, OH 45011

ROAD

LOCATION


SHEET NO 1/1

DATE 8-13-02

WEATHER SUNNY

TEMP.

PROJ. NO. Cobblers Creek Det. Basin

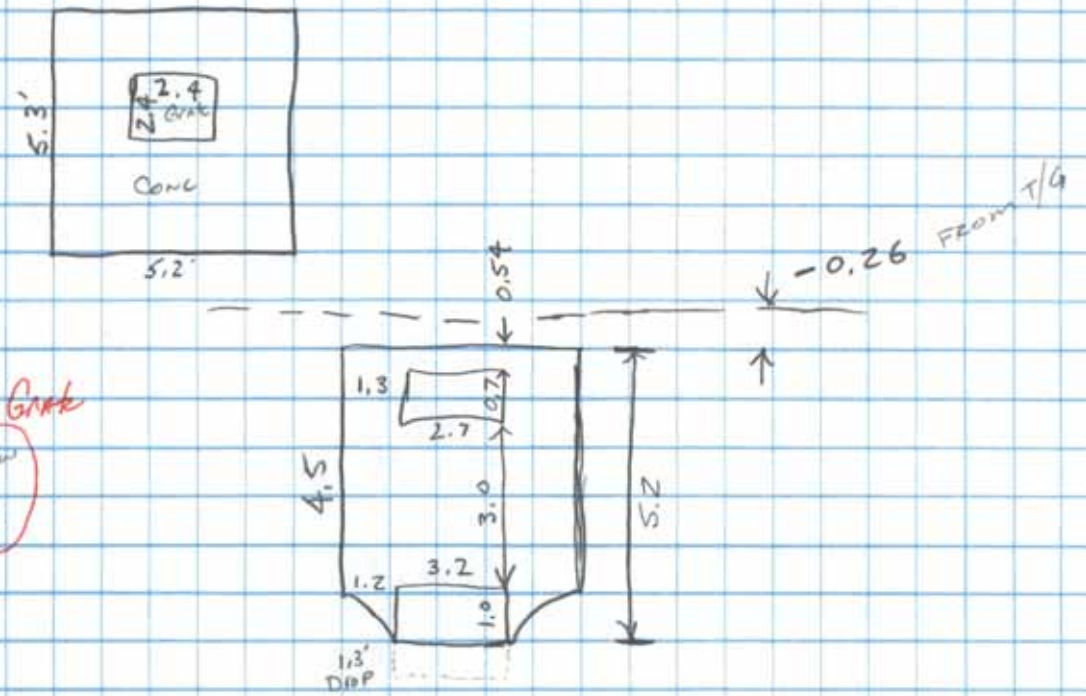

Depths From Grate
6.5 by Window
7.1' by Pipe

80.48 Top of Grate
80.22 Top of Dam

DETENTION BASIN TOTAL DEPTH: 5.2 - 0.26 = 4.94' → TOP OF LEVEE TO CB ORIFICE

DEPTH FROM CB WINDOW: 3 + (1 - 0.5) = 3.50' => H
(TO CENTROID OF ORIFICE)

ORIFICE EQUATION: $Q = C \cdot AREA \sqrt{2gH}$ C = 0.60

$= 0.6 \cdot 3.2 \sqrt{2 \cdot 32.17 \cdot 3.5}$

$= 1.92 \sqrt{225.4}$

$= 1.92 \cdot 15.01$

$= 28.819$ CFS

WINDOW
A = 1.89 SQFT
H = 0.63' — DUE TO LOWER LEVEE ELEVATION
Q = 7.22

AREA OF 36" 7.06 SQ FT
24" 3.14 SQ FT
18" 1.77 SQ FT

TOTAL Q TO 36" CMP = 28.82 + 7.22
= 36.04 CFS


Appendix B


SWS Environmental

Field Summary

03/13/2017 7562 Cincinnati-Dayton Road (Invoice Location Address)


Crew jetted rock/debris from 36” storm sewer from catch basin located adjacent to 7591 Cincinnati-Dayton Road. Jetting continued from catch basin north through system. Rock and large woody debris was removed from the pipe system up to a manhole near edge of a line of brush. Manhole is believed to be located 7594 Cincinnati-Dayton Road. Nozzle could only proceed approximately 7 to 10 feet upstream of manhole. BCEO requested assistance, pole camera, from WC TWP. Crew member from WC TWP place camera down manhole to photograph upstream side of manhole & pipe system, see images below. Due to obstruction, and after several failed attempts to break debris free, work was suspended midafternoon.

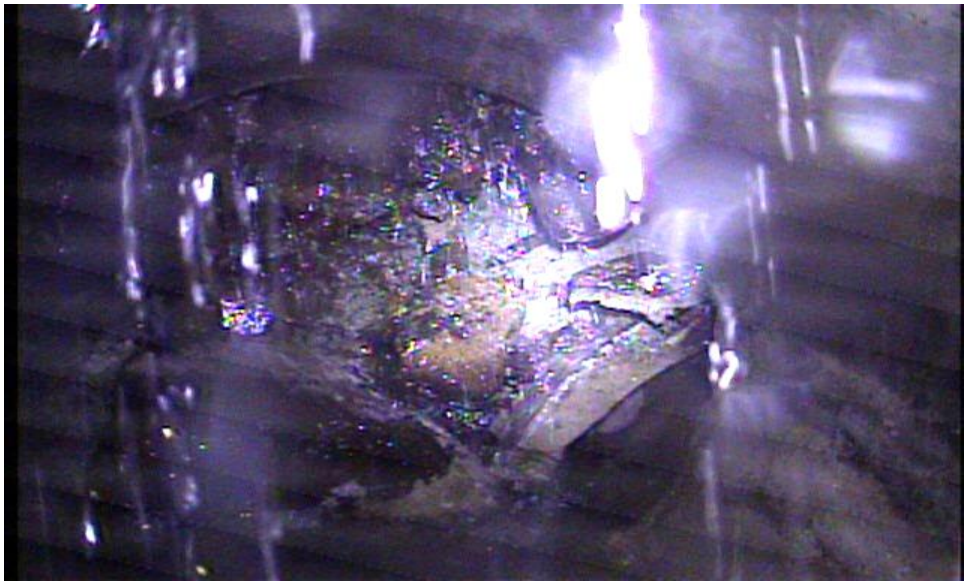

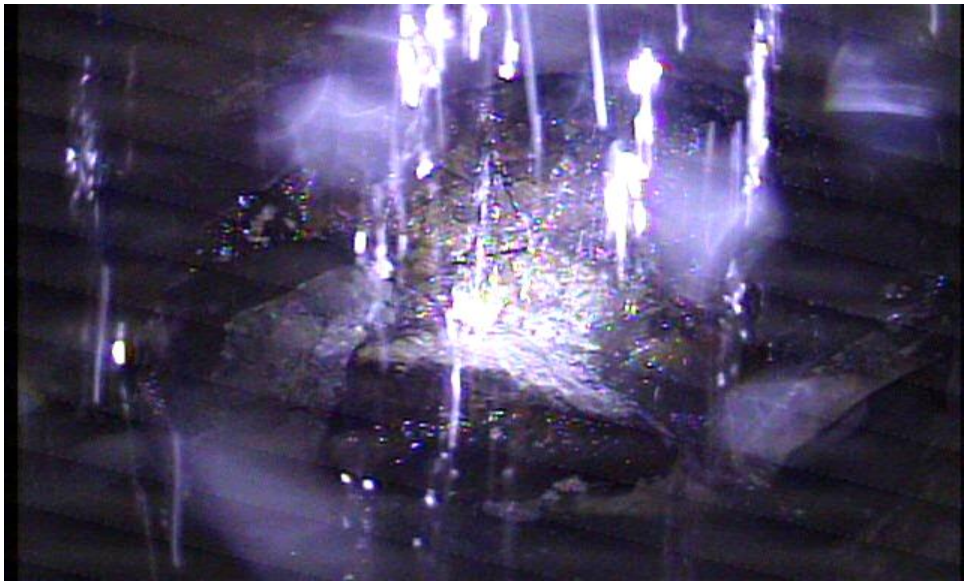

05/30/2017 7576 Cincinnati-Dayton Road

Crew began day between 8:30 & 9:00 in the morning at 7576 Cincinnati-Dayton Road. Crew had to dig down in order to find upstream and downstream ends of two pipes, 36” & 24”. The 36” pipe was 4 to 5 feet below heavy silt while 24” pipe was located at a higher elevation, approximately at top of 36” pipe. According to crew, once uncovered, upstream 24” pipe drained upstream flow. To better drain area, crew started jetting 36” concrete pipe. Location of 36” concrete pipe was below a 3 foot section of pipe and nearly immediately under a large tree. Work continued even though nozzle encountered two small obstructions. Woody debris and silt were brought up to inlet of 36” concrete pipe. Crew continued clearing pipe until nozzle was unable to break free from major obstruction. Hose was marked with tape in order to determine overall length of clear pipe. Once freed from obstruction, crew placed hose on surface until tape mark aligned with inlet of 36” concrete pipe. Nozzle was approximately 20 feet from known manhole from prior work. Nozzle fell in line with depression / sinkhole upstream of manhole. Based on measurements, collapsed section of pipe is approximately 10 to 15 feet in length. Due to depth of water in ravine and inlet of 36” pipe, work was suspended. SWS recommended no additional jetting occur until collapsed section of pipe has been resolved. SWS believe the 24” upstream storm pipe is not obstructed since water continues to drain throughout their duration or until outlet became submerged. Work was suspended around noon.

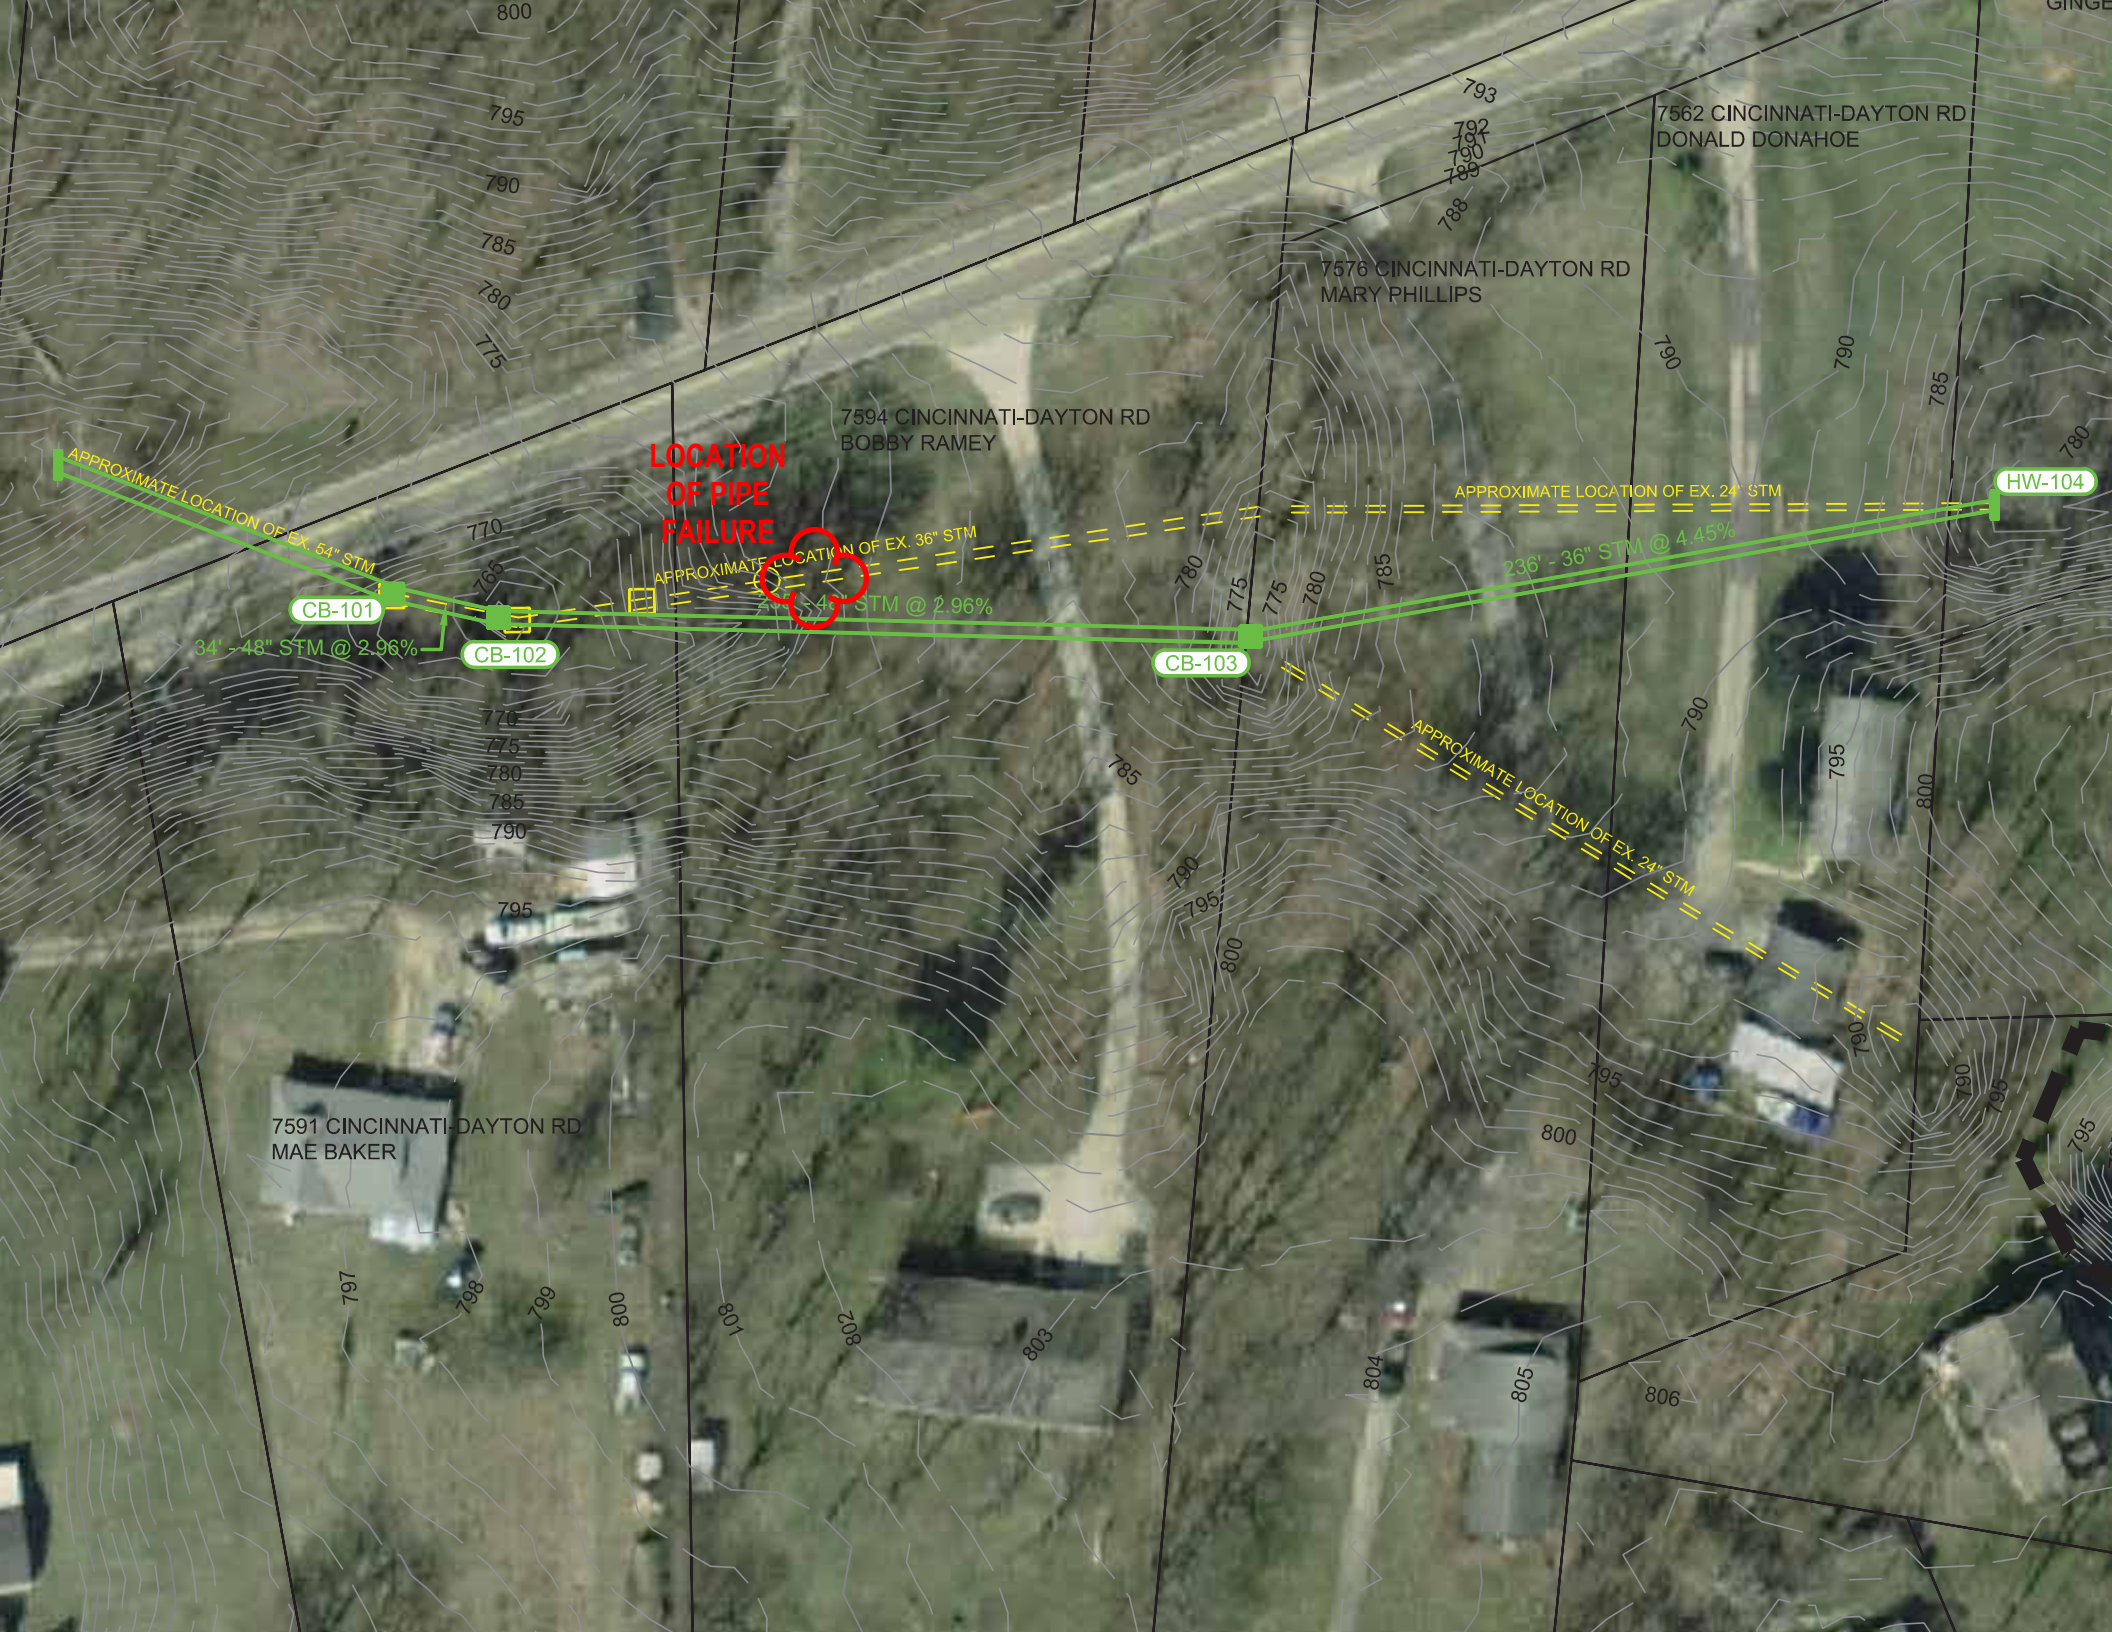
7562 CINCINNATI-DAYTON RD
DONALD DONAHOE
7576 CINCINNATI-DAYTON RD
MARY PHILLIPS
7594 CINCINNATI-DAYTON RD
BOBBY RAMEY
LOCATION OF PIPE FAILURE
APPROXIMATE LOCATION OF EX. 54" STM
APPROXIMATE LOCATION OF EX. 36" STM
APPROXIMATE LOCATION OF EX. 24" STM
APPROXIMATE LOCATION OF EX. 24" STM
CB-101
CB-102
CB-103
HW-104
34' - 48" STM @ 2.96%
236' - 36" STM @ 4.45%
7591 CINCINNATI-DAYTON RD
MAE BAKER

SWS ENVIRONMENTAL SERVICE
10860 INDECO DRIVE, CINCINNATI, OHIO 45241-2927 (513) 793-7417

Work Order #: + -
Job Title: Flush/Vac
Pipe Dia: 36"
Job/Contract #: 17070./

Customer Name: Butler County Storm Water District
Work Date: 03/13/17 Project Name/Address: 7562 CINCINNATI DAYTON ROAD
Area: Butler Co., OH Subarea:
Contact Person: ERIC POTTENGER 678-6325
F.H. Location Meter #:

Weather:
Job Completed? (Yes) / No
Phone #: 785-4121
Hydrant Pumped? Yes / No


EQUIPMENT & PERSONNEL:	UNIT NO:	HRS:	JOB DESCRIPTION:
Flusher/Vac B-10	546	5 1/4	F/C Approx. 100' U/S From CB-1
Utility Truck	541	5 1/4	to MH-1 removing Rocks Mud & Gravel
" / "	536		Found Pipe to be 100% collapsed
T. Clapper		5 1/4	
T. Mills		5 1/4	
Jed		5 1/4	
Buzz		5 1/4	
Bill		5 1/4	

Total Footage: Cleaned Cut TV'd Launched

Recommendation:

Manhole Lid Replaced? (Yes) / No
Initialed By: JC

SKETCH:

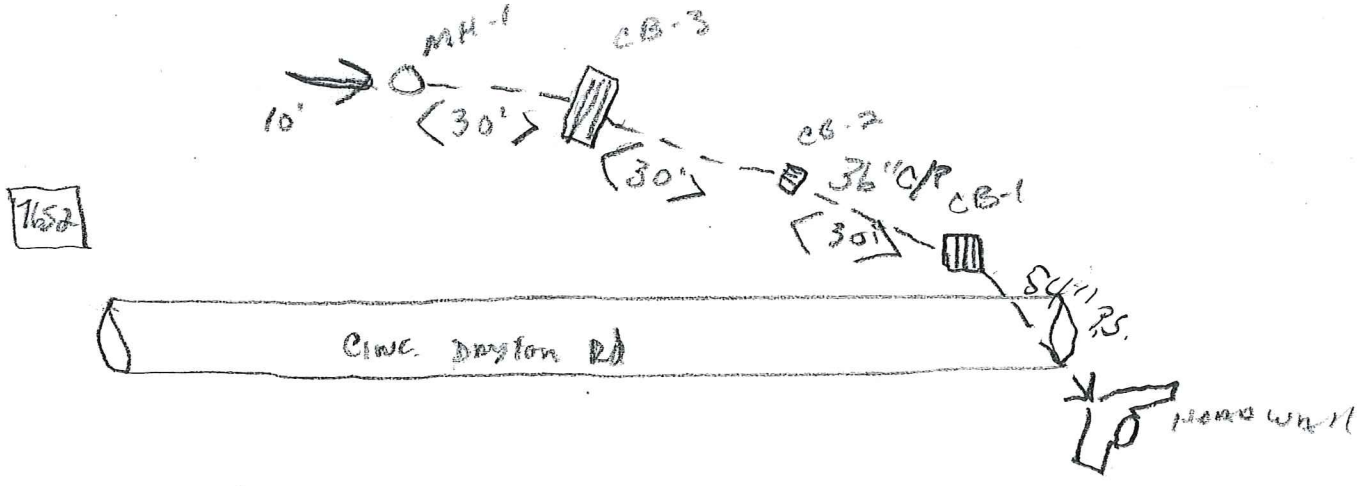

SWS ENVIRONMENTAL SERVICE
10860 INDECO DRIVE, CINCINNATI, OHIO 45241-2927 (513) 793-7417

Work Order #: + -
Job Title: Flush/Vac
Pipe Dia: 36"
Job/Contract #: 17070./

Customer Name: Butler County Storm Water District **Weather:**
Work Date: 05/30/17 **Project Name/Address:** 7562 CINCINNATI DAYTON ROAD
Area: Butler Co., OH **Subarea:** **Job Completed?** (Yes) / No
Contact Person: ERIC POTTENGER 678-6325 **Phone #:** 785-4121
F.H. Location **Meter #:** **Hydrant Pumped?** Yes / No

EQUIPMENT & PERSONNEL:	UNIT NO:	HRS:	JOB DESCRIPTION:
Flush VAC	526	5	F/C. From Ditch line #2 D/s towards
Utility Truck	541	5	grate
T. Clipper		5	
Tires		5	
B.M.		5	

Total Footage: Cleaned Cut TV'd Launched

Recommendation: **Manhole Lid Replaced?** Yes / No
Initialed By:

SKETCH: 7562

