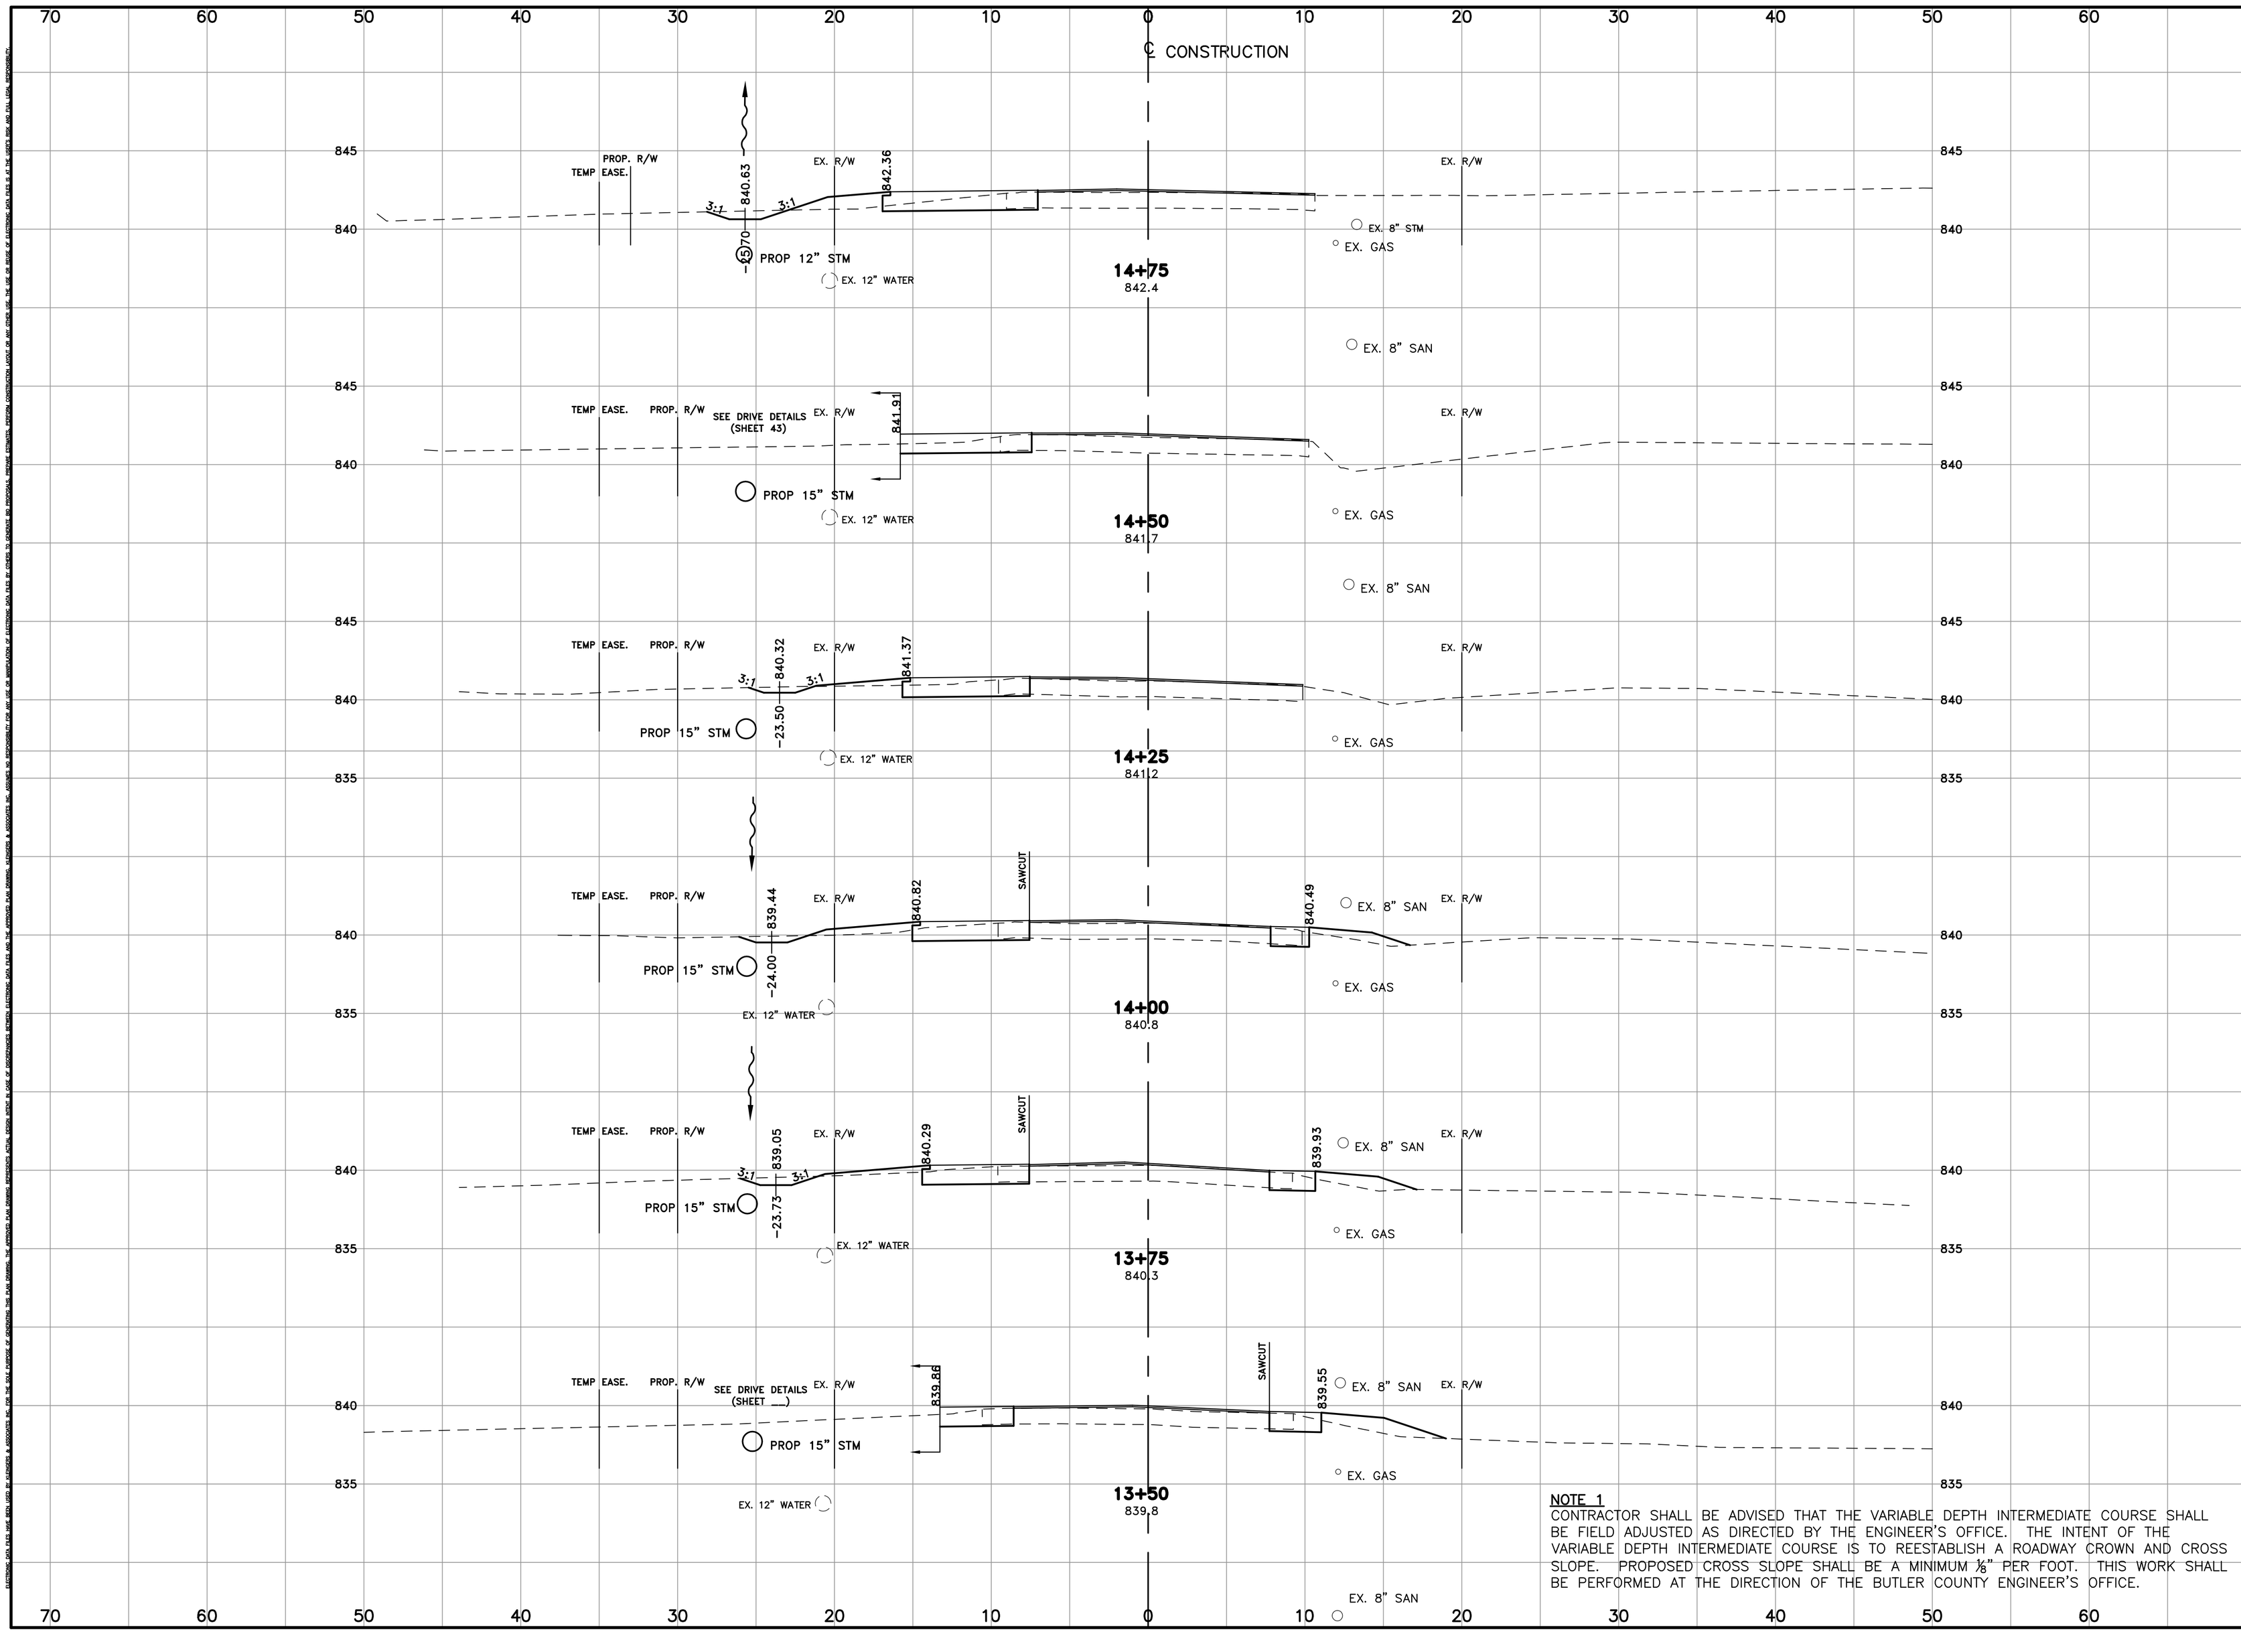


NOTE 1
CONTRACTOR SHALL BE ADVISED THAT THE VARIABLE DEPTH INTERMEDIATE COURSE SHALL BE FIELD ADJUSTED AS DIRECTED BY THE ENGINEER'S OFFICE. THE INTENT OF THE VARIABLE DEPTH INTERMEDIATE COURSE IS TO REESTABLISH A ROADWAY CROWN AND CROSS SLOPE. PROPOSED CROSS SLOPE SHALL BE A MINIMUM ⅛" PER FOOT. THIS WORK SHALL BE PERFORMED AT THE DIRECTION OF THE BUTLER COUNTY ENGINEER'S OFFICE.

END AREA		VOLUME	
CUT	FILL	CUT	FILL
		4	12
7.6	4.2		
		6	2
4.8	0.0		
		5	1
6.6	1.4		
		6	4
7.3	5.9		
		7	6
8.3	5.7		
		6	6
4.5	5.2		
SHEET TOTAL		34	31

HORIZONTAL SCALE IN FEET 0 5 10
VERTICAL SCALE IN FEET 0 5 10
CALCULATED GAU
CHECKED NMM

CROSS SECTIONS - BETHANY ROAD
STA.13+50 TO STA. 14+75

KLEINGERS & ASSOCIATES
ENGINEERS AND SURVEYORS
8163 Corporate Park Drive
West Chester, OH 45069
513-779-7851 Fax: 513-779-7852

H:\engineering\2003-2004\P031224\dwg\005\031224005-x-sec0.dwg, 2/15/2008 8:40:06 AM, gumasek